

Jake's

Club Car DS Extension Plate

PART # 7260

PARTS LIST

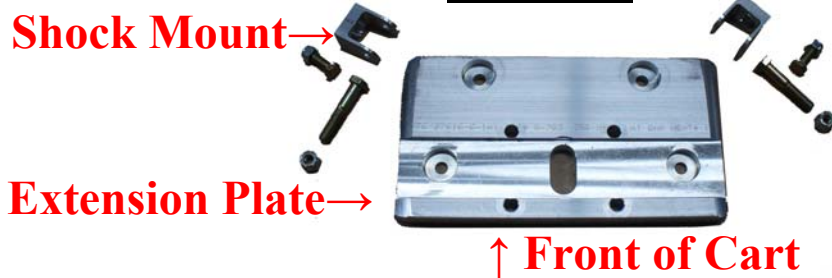


FIGURE 1

Assembly Instructions

1. Remove the stock wheels, tires, spindles, spindle yolks & shocks.
2. Remove the 4 bolts that are holding the front leaf spring & a-arm steering mount.
3. Remove the toe plate, leaf spring plate & leaf spring. You will not be reusing the leaf spring plate.
4. Mount Jake's extension plate to the bottom of the frame, using the stock bolts, with the leaf spring grid down and towards the front of the cart as shown in **FIGURE 1**.
5. Hold the leaf spring in the leaf spring grid placing the center bolt in the oval hole. Using the stock bolts, bolt the 4-hole toe plate to the bottom of the extension plate.
6. Unbolt each a-arm and cut shock mount off, grind & repaint. Flip ½ of a turn and remount.
7. Put new shock mount in center of the a-arm as close to the outer weld as possible. Mark and drill hole and install new shock mount with supplied 5/16" x 3/8" bolt and lock nut. With the top of the shock still in its original location, remount the bottom of the shock in the new shock mount with the supplied 3/8" x 1 3/4" nuts & bolts.
8. Reassemble spindles, and reinstall wheels and tires.
9. Loosen jam-nut & turn center bolt on the bottom of the leaf spring to adjust the caster & camber as needed.
10. Securely tighten all bolts!



FIGURE 2

