

# MADJAX

Installation Instructions for:

## LED ULTIMATE LIGHT KIT PLUS #02-048

## LED ULTIMATE LIGHT KIT PLUS- WITH RGB #02-100

Will fit E-Z-GO® TXT® (2014-UP)



### ITEMS INCLUDED

Front and Rear lights  
Wiring harness  
Rocker switch  
Turn Signal  
Brake Switch  
Horn  
USB port  
Converter  
Column Cover  
**RGB** Module (02-100)

### TOOLS NEEDED

Phillips Head Screw Driver  
Cutting Tool  
Sandpaper  
Power Drill  
15/32 Drill Bit

### Control box features:

- 30 second turn signal timer
- Eliminates flashers/ Relay
- Brake Lights Automatically turn off after 3 minutes of setting parking brake.

RGB Module controlled by  
Happy Light App



iOS7.0 & Android 4.3

We recommend professional installation. If you choose to not have this product installed by a professional, we highly recommend that you exercise caution, care, and patience when installing this product.



**Important:** Any modifications made to the wiring harness or lights in this kit will void the warranty. Any damages that occur to the kit or cart will be the sole responsibility of the installer.

**\*ATTENTION: The Instructions for this Ultimate Plus Light Kit & RGB Light Kit are identical\***

## STEP 1


Switch key to OFF position. Place TOW/RUN switch to TOW. It is not required to remove the batteries but you do need to disconnect the main negative.

## STEP 2

### \*Harness Installation:

Lift the cart and place jack stands to support. Feed the headlight portion of the harness down through the front of the battery compartment. Route the wiring harness through the holes under the frame. Run long tail light wire under the seat and over the rear tire well on the passenger's side. Run short tail light wire under the seat and over the rear tire well on the driver's side. Loosely secure with wire ties until all lights have been installed.

**Red plugs should be aligned to passenger side, white plugs for driver's side.**

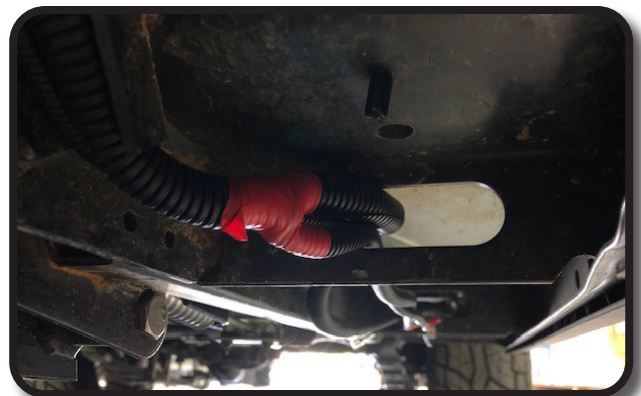

## STEP 3

**\*For carts without a pre-cut hole:**

Align headlight template to the body contour as shown. Be sure to use alignment references for proper placement. Use a marking pen to trace the inside line.

Next drill a pilot hole so you will have a starting point and then begin cutting. Be sure to drill and make cuts to the inside of the line. \*Use sandpaper to smooth edge.

\*Flip template over and repeat process on other side.



## STEP 4

**\*For carts with factory lights:**


Remove factory headlight from the cowl.  
Disconnect factory headlight wiring.



## STEP 5

Plug in 6 pin connector from headlight to 6 pin on harness.

*NOTE: Red connector for Passenger side*

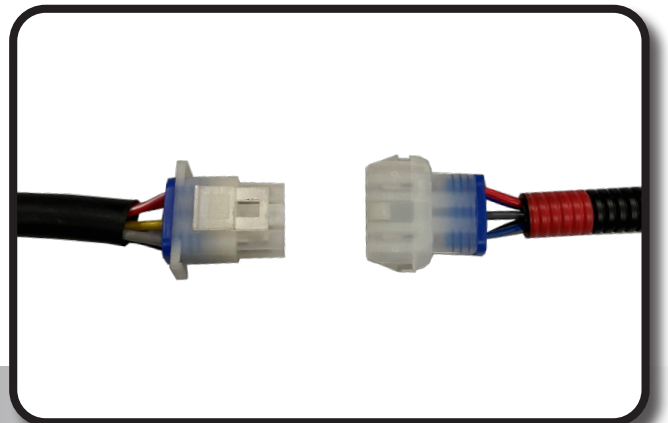


## OPTIONAL RGB MODULE INSTALL FOR 02-100 ULTIMATE PLUS RGB LIGHT KIT

**ATTENTION:** For Ultimate Plus Light Kit Instructions (02-048), Skip to Step 7.


### STEP A

Connect the 2-Pin Connector from RGB Module to the Light Kit Harness.

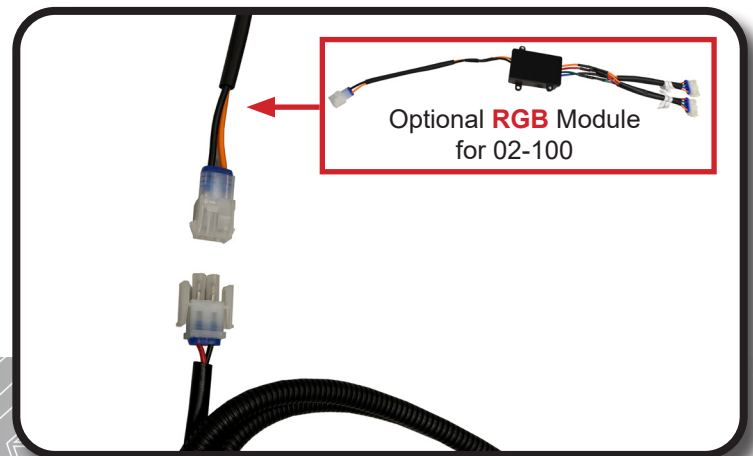

### STEP B

Connect the 4-pin Connector from RGB Module to the Headlight.

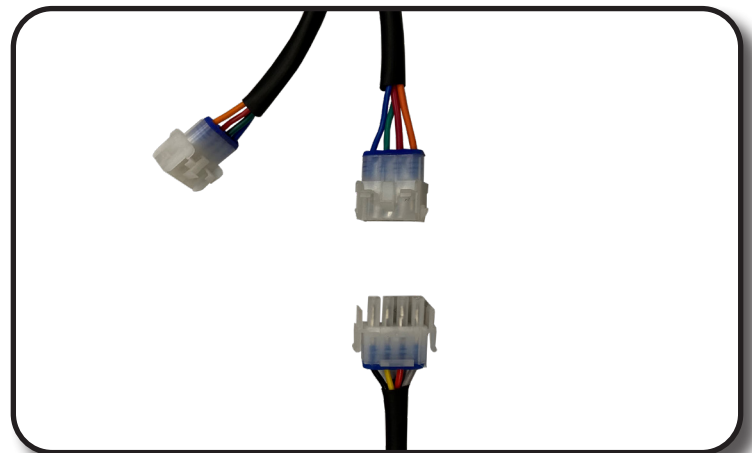

**END OF OPTIONAL INSTALL FOR RGB MODULE 02-100**

### STEP 6

Mount headlight through the cutout. Push top half in first as shown.

\*Repeat process on opposite side.



## STEP 7

**\*For carts without a pre-cut hole:**

Align Tail Light template to the body contour as shown. Be sure to use alignment references for proper placement. Use a marking pen to trace the inside line.

Next drill a pilot hole so you will have a starting point and then begin cutting. Be sure to drill and make cuts to the inside of the line.

\*Use sandpaper to smooth edge.

\*Flip template over and repeat process on other side.



## STEP 8

**\*For carts with factory lights:**

Remove factory tail light hardware. Retain hardware. Disconnect factory tail light wiring harness from tail light.



## STEP 9

Feed the tail light harness through the back of the cart. Attach rear tail light wire harness as shown. Secure wire with ties.



## STEP 10


Install new tail lights using retained hardware.

\*Repeat process on opposite side.




## STEP 11

Using a Phillips head screw driver, remove the 5 screws on the dashboard and retain hardware.

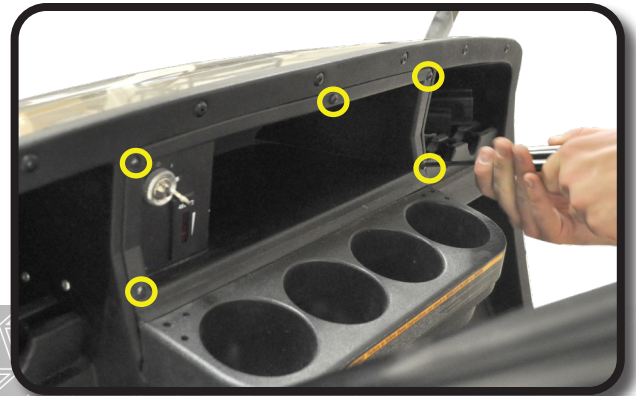


## STEP 12

Using a 15/32" drill bit, find a desired location on your golf cart dashboard to mount your rocker switch for hazard lights. Ensure your location is free of obstacles and will not affect dash reattachment.

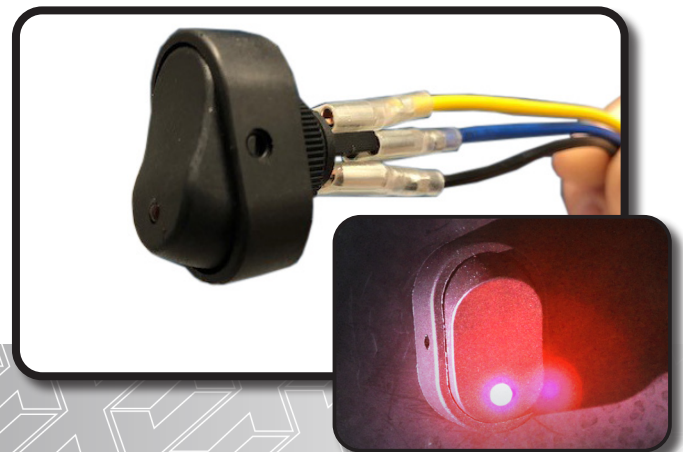


## STEP 13

Plug in the 12 pin connector from the main harness to the 12 pin connector on the turn signal module secure module behind dash.

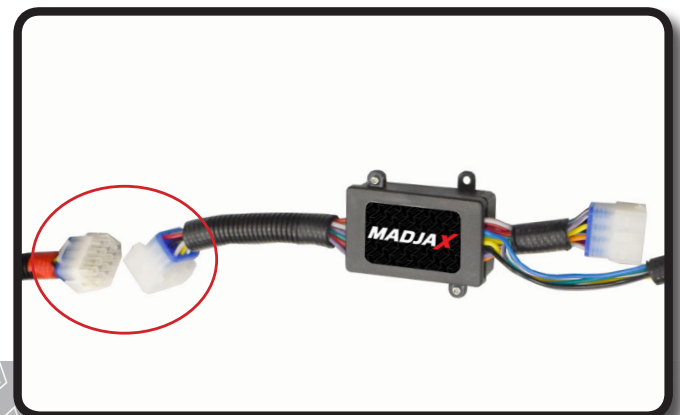

## STEP 14


Using a 1 1/8" paddle bit, find a desired location on your golf cart dashboard to mount your USB charger. Ensure your location is free of obstacles and will not affect dash reattachment.

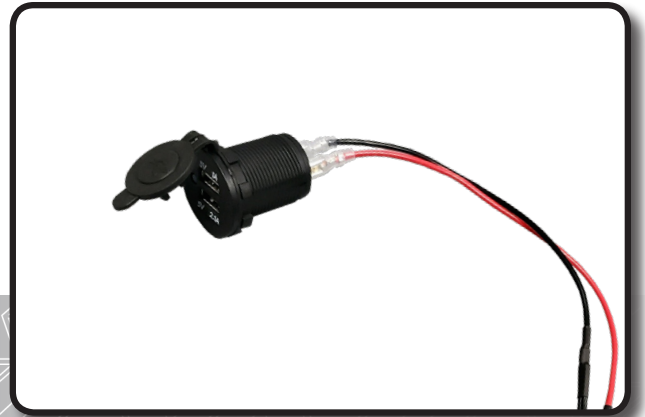

## STEP 15

Using the supplied hardware, mount the charger in the dash.

Plug the red and black 12 volt accessory connection from the light kit harness to the spade terminals on the back of the charger (red to positive and black to negative).

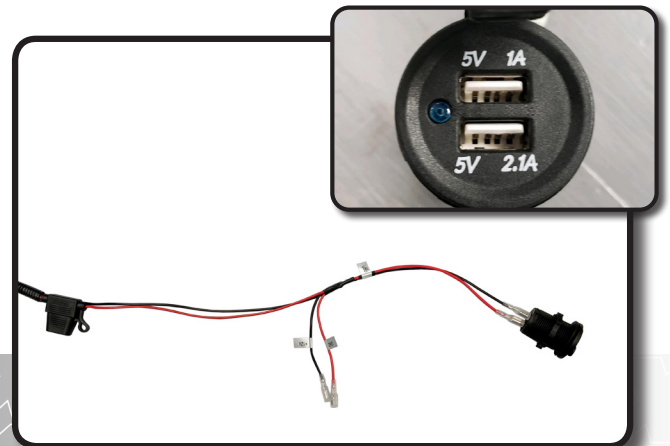


## STEP 16

Put the supplied u-bolts behind the floor frame member next to the brake pedal. Align the brake switch bracket with the 90 degree flange facing the front of the cart and the switch button facing down. Make sure the 4 threaded ends of the u-bolts go through the slotted holes in the bracket and hand tighten the nuts. Do not fully tighten at this time. Slide the bracket sideways so that the button of the brake switch is centered on the brake pedal arm. Slide the bracket down until you hear the switch click. Tighten all the nuts.

Plug the 2 bullet connectors from the brake switch into the corresponding bullet connectors on the light kit harness. Secure all wiring so that it is away from moving parts.

Tighten all wire ties under cart to secure harness.

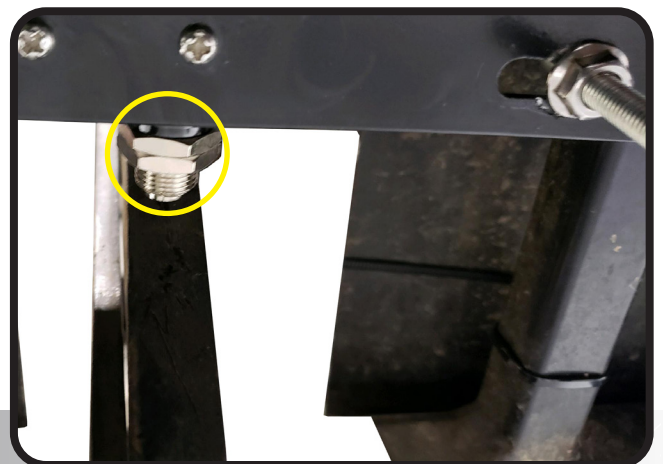

## STEP 17


Mount indicator assembly using clamps provided and tighten. Run indicator harness along steering column and insert harness through dash.



## STEP 18

Attach turn signal back cover to turn signal assembly. Attach column cover to steering column, secure harness in column cover void.

Plug in the Turn Signal harness to the Control Box harness as shown.

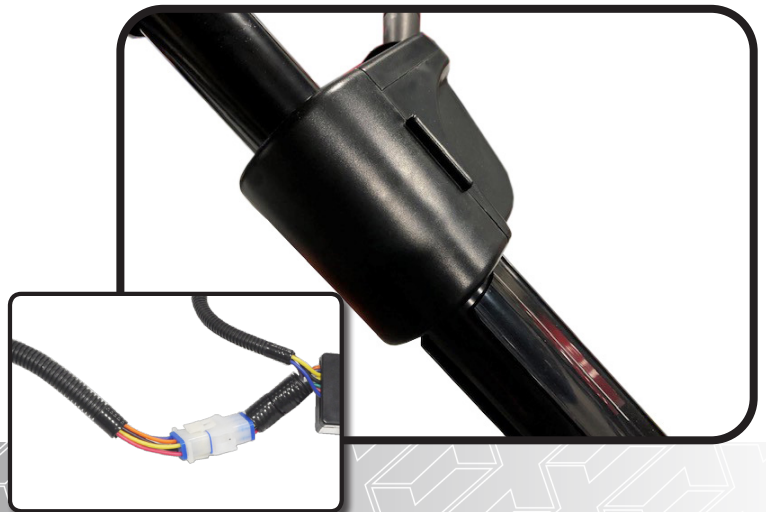

## STEP 19

Attach horn to purple and black female spade connectors and secure horn to metal framework under front cowl with supplied hardware.







## STEP 20 \*Auxiliary Switch Feature\*

The turn signal handle has a secondary, 2-position rotary switch for auxiliary 12 volt lighting such as fog lights and/or LED light bars. There is one common negative wire and two positive wire connections to run two different auxiliary lights. Additional wiring and lighting not included.

Reinstall dashboard using retained hardware from Step 11.

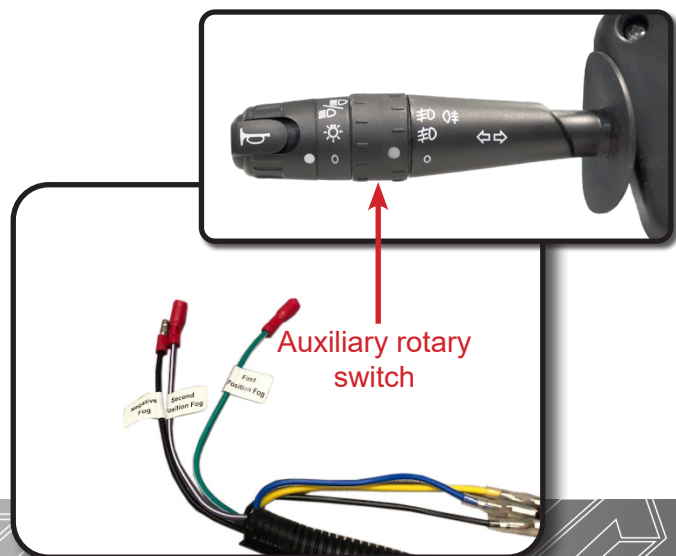

## STEP 21 \*Converter Install\*

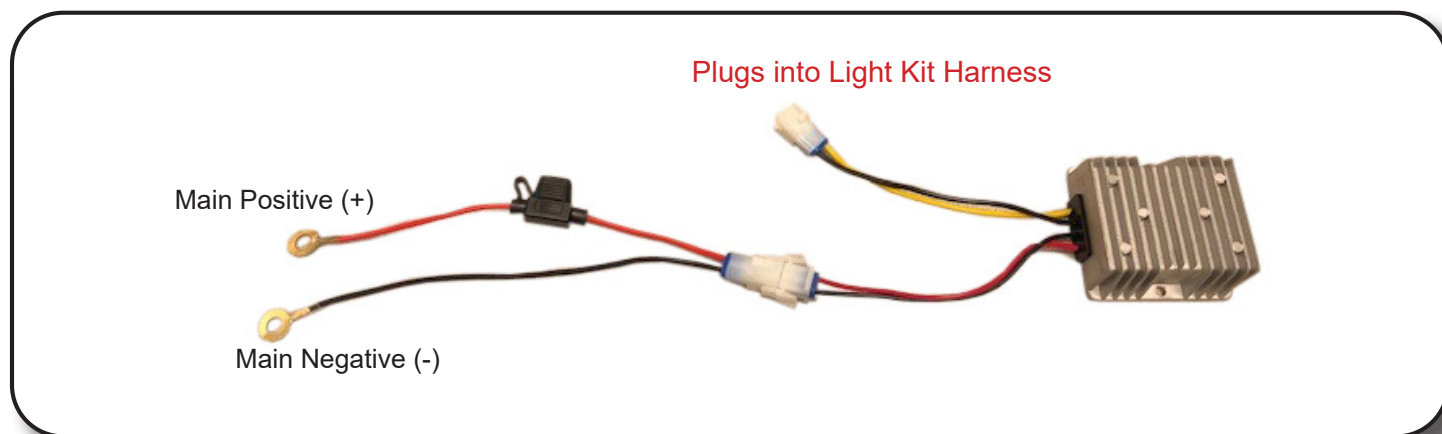

The voltage converter included must be used on all carts electric and gas. Connect the red wire with the fuse to the Main Positive terminal of the battery pack. Connect the black wire to the Main Negative terminal of the battery pack and tighten hardware.

Mount the converter to a flat surface under the seat. (Metal area is preferred). Plug the connector with the yellow and black wire into the light kit harness (you will notice a small arc when connecting). Reconnect battery and place run/tow switch to run.

**\*Use converter on gas carts to prevent Starter Generator voltage spikes that could cause damage to accessories.**

# INSTALLATION COMPLETE

E-Z-GO®, TXT®, RXV® and S4® are registered trademarks of Textron Innovations, Inc. Club Car®, Precedent®, DS®, Onward® and Tempo® are registered trademarks of Ingersoll Rand, Inc. Yamaha®, Yamaha® Drive®, Drive2®, G-14®, G-16®, G-19®, G-22® and G-29® are registered trademarks of Yamaha Golf-Car Company. Any reference to Club Car®, E-Z-GO®, or Yamaha® or their associated trademarks, word marks, and products are only for purposes of identifying golf carts with which this Madjax product is compatible. Madjax products are aftermarket parts and are not original equipment parts. Madjax is not connected to, affiliated with, sponsored by, or endorsed by either Textron Innovations, Inc., Ingersoll Rand, Inc., Yamaha Golf Cart Company, or any of their parent or subsidiary companies.