



# INSTALLATION INSTRUCTIONS CLUB CAR PRECEDENT SSCCPC05



1.) Remove side handles and mounting hardware from stock seat base.




2.) Cut out “pentagon” shaped hole templates from side of instruction sheet and place on bottom side of handles as shown. (see figure 1) Drill 3/8” hole as marked by template. (see figure 2) Enlarge existing stock hole to 3/8” to aid in installation. (see figure 3)



3.) Install handles and hinge tabs on base of Suite Seat.  
**\*IMPORTANT\*** Hand start all bolts to prevent damage to t-nuts. Seat base can now be installed on cart.



4.) Remove stock seat back.

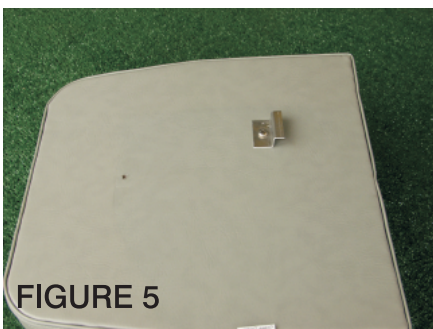

5.) Install clip for each Suite Seat back as shown. (see figure 5)

6.) Install Suite Seat Backs.  
**\*IMPORTANT\*** Start all bolts by hand to prevent damage to t-nuts.

