


# 28908 LIFT KIT

## Installation Instructions For EZGO Marathon Gas 1980 - 1994 .5 Models


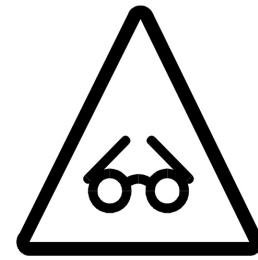


**SAFETY CAUTION!** Disconnect the battery and or batteries before working on this equipment. You must have a suitable jack and jack stands. Safety glasses should be worn for your protection.

Caution: Wear Appropriate Eye Protection!


### Front:

Raise the car up as high as possible and place jack stands to support the car. Remove the tires and lower shock nuts and keep the hardware. Break the drag link jam nut loose using a 7/8" wrench. Remove the outer drag link end nut and remove the end from the arm spindle using a separator tool. Remove the eight axle mounting bolts and remove the axle. Install the Risers to the car using 8 of the 1 1/2" bolts (leave the bolts loose for now). Then install the axle to the Riser using 8 of the 1 1/4" bolts and tighten all the nuts and bolts at this time, making sure of the alignment of the axle is square to the chassis. Drill 1/4" from the top of the spindle arm hole with a 1/2" drill bit. This will allow the drag link end to fit properly (tighten the jam nut). The end is now going in the opposite way it came out. Install the shock extenders using 2 of the 1 1/4" bolts and shock hardware. Tighten the nut until the rubber bushing is flat with the washer. Tighten all nuts and bolts to 30 - 35 foot pounds.

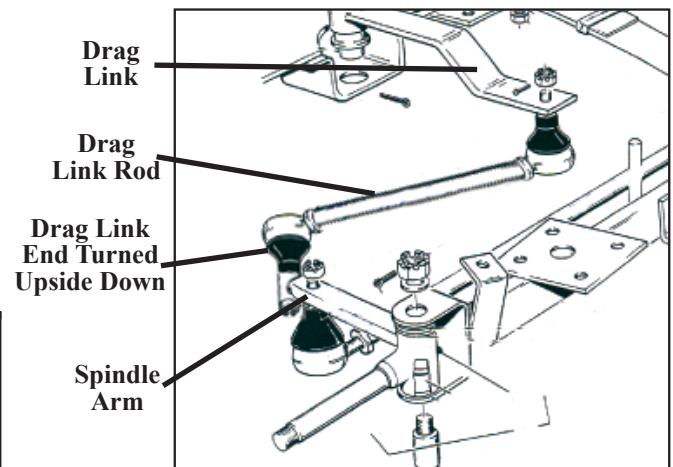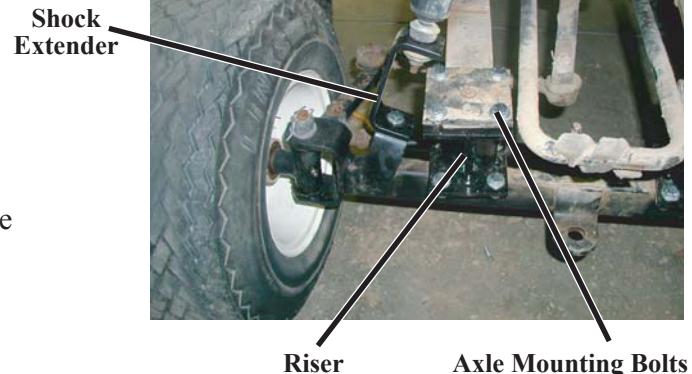

### Rear:

Raise the rear of the car as high as possible and place jacks stands to support the car. Place the floor jack under the drive unit to support it. Remove the tires and lower shock bolts. Lower the axle assembly low enough to install the shock risers using 2 of the 1" bolts, then add the shock extensions. Install the nuts and bolts and torque to 30 - 35 foot pounds.

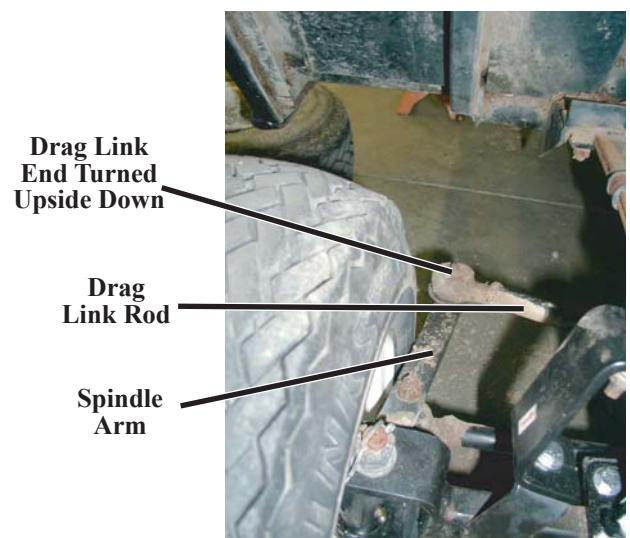

Copyright Nivel LLC  
All Rights Reserved

# 28908 LIFT KIT

Qty.	Size	Item	Item #	Hardware
8	3/8" x 1-1/2"	Bolts	110120346	
10	3/8" x 1-1/4"	Bolts	110120345	
4	3/8" x 2-3/4"	Bolts	13114	
22	3/8"	Lock Nuts	1137024	
44	3/8"	Flat Washers	1133082	

## Indemnification And Insurance Agreement

High Performance Enhancement Kit purchaser assumes sole and entire responsibility for, and shall indemnify and save harmless Nivel LLC, from any and all claim, liability, responsibility, and persons or property that may be sustained in connection with the use of any product before or after purchase, including but not limited to high performance enhancement lift kits. The High Performance Enhancement Kit purchaser also shall indemnify Nivel LLC harmless with respect to any and all liability that may be incurred.

Golf Cars are recommended for use only by those aged 16 and older. Golf Cars can be especially hazardous to operate. Always remember that riding and alcohol/drugs don't mix. Never ride on public roads. Never carry more than two passengers (except shuttles and trams). Never engage in stunt driving. Avoid excessive speeds and be particularly careful on difficult terrain. Nivel LLC reserves the right, at any time, to discontinue or change specifications, prices, designs, features, models, or equipment without notice and without incurring any obligation.



Copyright Nivel LLC  
All Rights Reserved